


# HLG

Hy-Light Group, Inc

LED Lighting  
for Plant Growth


HLGFRT Series

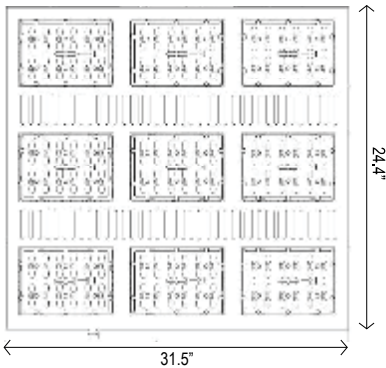



Flower Footprint: 4' x 4' (PPFD: 1,200 micro-moles)  
 Direct replacement for 1210-1081 HPS/MH horticulture lighting systems  
 Efficiency of LED chips: 2.00 PPF/Watt  
 Housing: High performance, superior strength iron plate stamping  
 Finish: White powder coat that is corrosion and static resistant  
 Heatsinks: Substantial, passive, high performance aluminum  
 Lens: Optical grade polycarbonate, anti UV  
 LED Modules: IP65  
 Beam Angles: VW (Very Wide), M (Medium)  
 LED Drivers: Constant current, efficiency up to 92%, PF ≥ 0.95  
 Warranty: 5-years

Dimensions (inches/millimeters)				
Watts	Length	Width	Height	Weight
600	31.5" (800mm)	24.4" (620mm)	6.3" (160mm)	66 lbs.

Plant Growth Stage

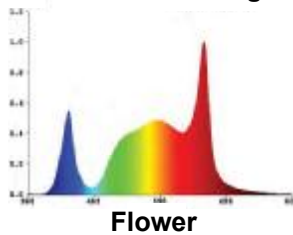

Distribution Curve Flux

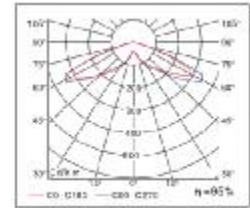

Flower

M - Medium

VW - Very Wide

Company Code	Growth Stage	Shape	Wattage Voltage	Finish	Optic	Included
HLG	F (Flower)	RT (Rectangular)	600W (120/240)	W (White)	VW (Very Wide)  M (Medium)	<b>Manual Dimming:</b> 100%, 67%, 33%  <b>Fixture Daisy Chaining:</b> Power Inlet IEC C14 Power Outlet IEC C13  15' Cord with 120-Volt Plug

HLGFRTLW600