

HLG


Hy-Light Group, Inc

LED Lighting
for Plant Growth

HLGVRDS Series




S Series

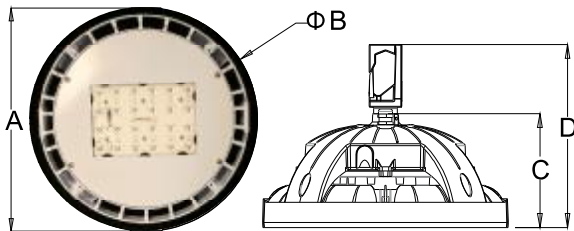

Dimensions (inches/millimeters)


Wattage	A	B	C	D	Weight
80	11.7 (298)	11.5 (292)	5.3 (135)	6.4 (163)	7.6 lbs.

Distribution Curve Flux

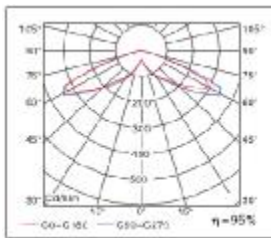

VW - Very Wide

Plant Growth Stage

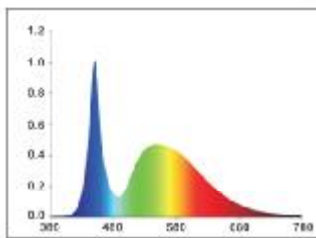

Vegetative

Veg/Clone Footprint: 3' x 3'

Direct Replacement for (8) lamp T-5HO (432 watts)

Housing: Die cast aluminum

Finish: White powder coat that is corrosion and static resistant

Fixture Hanging: Heavy duty industrial latch hook

Heatsink: Substantial, passive, high performance aluminum

Lens: Optical grade polycarbonate, Anti UV

LED Modules: IP65

Beam Angles: VW (Very Wide)

LED Drivers: Constant current, Efficiency up to 92%, PF ≥ 0.95%

Warranty: 5-years

Company Code	Growth Stage	Shape	Wattage Voltage	Finish	Optic	Included
HLG	V (Vegetative)	RD (Round)	80W 120/240	W (White)	VW (Very Wide)	Manual Dimming 100%, 75%, 50% 15' Cord and 120V Plug